



Contact: Mr. Li Zhiyong (Owner)

Mobile(Whatsapp): +86-13467138000

Skype: qslizy

E-mail: qscasting@126.com

www.qiaoshan.co

Tel: 86 10 64644308

Room 256, Building 1, No. 35 Zhenxing Road, Changping, Beijing 102200

Fax: 86 10 64644308



NO HUB PIPE. 10' LAYING LENGTH

Size	Wt/Piece(Kgs)	Wt/Piece(Lbs)	Pieces/Bundle	Kgs/Bundle	Lbs/Bundle
1 1/2"	13.0	29	84	1092	2407
2"	16.3	36	68	1108	2444
3"	23.5	52	44	1034	2280
4"	33.5	74	30	1005	2216
5"	42.6	94	21	895	1972
6"	51.0	112	18	918	2024
8"	82.2	181	10	822	1812
10"	130.0	287	8	1040	2293
12"	148.0	326	6	888	1958
15"	241.8	533	3	725	1599

DIMENSIONS AND TOLERANCES

Size	Wt/Piece(Lbs)	ID	OD	Norm T	Min T
1 1/2"	29	1.50±.06	1.90±.06	0.16	0.13
2"	36	1.96±.09	2.35±.09	0.16	0.13
3"	52	2.96±.09	3.35±.09	0.16	0.13
4"	74	3.94±.09	4.38+.09/-.05	0.19	0.15
5"	94	4.94±.09	5.30+.09/-.05	0.19	0.15
6"	112	5.94±.09	6.30+.09/-.05	0.19	0.15
8"	181	7.94±.13	8.38+.13/-.09	0.23	0.17
10"	287	10.00±.13	10.56±.09	0.28	0.22
12"	326	11.94±.13	12.50±.13	0.28	0.22
15"	533	15.11±.13	15.83±.13	0.35	0.3

Mechanical Properties: Tensile Strength not less than 21000psi (145Mpa).

Straightness of Pipe: Deflections not exceed 5/8"(16mm).

Hydraulic Pressure Test: 0.45Mpa (65psi)

Cut: Smooth by snap cutter.

Exterior Coating: Asphalt Paint.

Interior Coating: Epoxy Asphalt Paint.

Packing: Pipes are bundled with 7 strips steel bands and lay on solid wood pallet.





Quality is first

CISPI301/ASTM A888 No-Hub Pipe Catalog

www.qiaoshan.co

RICHANG QIAOSHAN PIPE

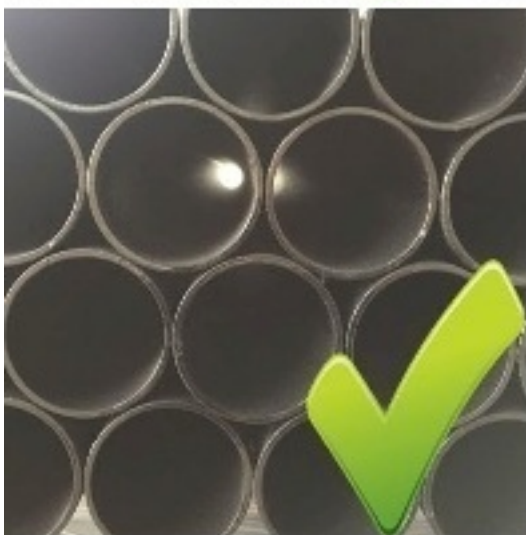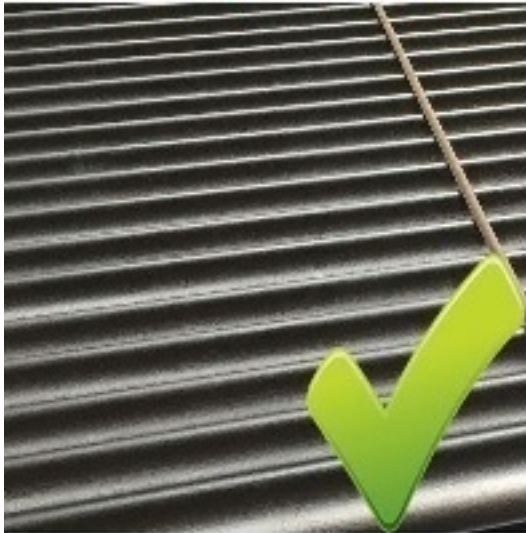

OTHER FOUNDRIES PIPE

