

배수용 주철관-1종



Contact: Mr. Li Zhiyong (Owner)

Mobile(Whatsapp): +86-13467138000

Skype: qslizy

[E-mail: qscasting@126.com](mailto:qscasting@126.com)


www.qiaoshan.co



배수용 주철관-1종

KS Approval No.: KWWA-KS-2016-053

부표 24 노허브 직관 1종

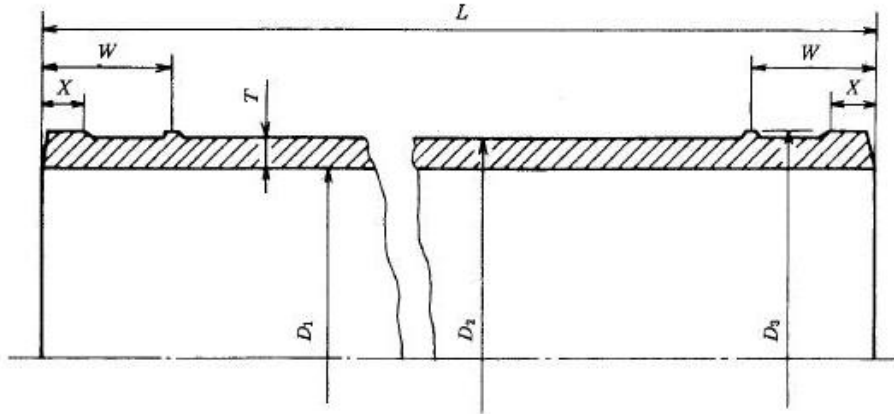

단위 : mm

호칭 지름	관 두께 T	실 안지름 D ₁	실 바깥지름 D ₂	러그 개스킷의 나비 W	삼입구 치수		무 게(kg)	
					D ₃	X	유효 길이 (L)=1 500	유효 길이 (L)=3 000
50	4.1	50	59	29	62	6	7.5	15.0
75	4.1	76	85	29	88	6	11.1	22.2
100	4.8	101	111	29	114	8	17.2	34.4
125	4.8	127	137	38	140	8	21.5	43.0
150	4.8	152	162	38	165	8	25.5	51.0
200	5.8	203	215	51	218	8	41.1	82.2

비 고 무게는 주철의 비중을 7.2로 하여 산출한다.

Mechanical properties: Minimum tensile strength 150 MPa

Straightness of Pipes: Deflections not exceed 5/8"(16mm)

Hydraulic Pressure Test: 0.45Mpa (65psi)

Coating of Exterior: Asphalt Paint

Coating of Interior: Epoxy Paint

Packing: Solid wooden pallet




Quality is First

KSD 4307 Cast Iron Pipe Catalog

www.qiaoshan.co

RICHANG QIAOSHAN PIPE

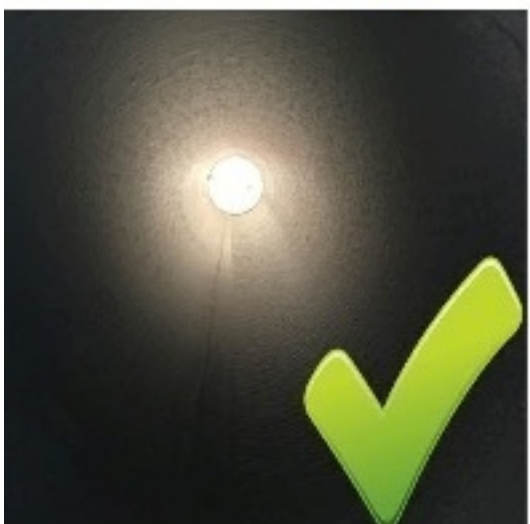

OTHER FOUNDRIES PIPE

