


Dimensional Data are Subject to Manufacturing Tolerance and Change Without Notice

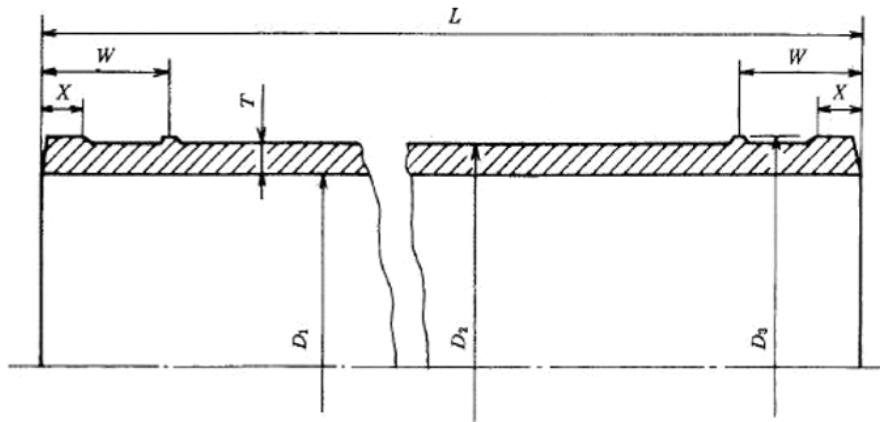

단위 : mm

호칭 지름	관 두께 $T$	실 안지름 $D_1$	실 바깥지름 $D_2$	러그 개스킷의 나비 $W$	삼입구 치수		무 게(kg)	
					$D_3$	$X$	유효 길이 ( $L$ )=1 500	유효 길이 ( $L$ )=3 000
50	4.1	50	59	29	62	6	7.5	15.0
75	4.1	76	85	29	88	6	11.1	22.2
100	4.8	101	111	29	114	8	17.2	34.4
125	4.8	127	137	38	140	8	21.5	43.0
150	4.8	152	162	38	165	8	25.5	51.0
200	5.8	203	215	51	218	8	41.1	82.2

비 고 무게는 주철의 비중을 7.2로 하여 산출한다.

### Mechanical Properties

Tensile Strength not less than 21000psi (145Mpa).

### Straightness of Pipes

Deflections not exceed 5/8"(16mm).

### Hydraulic Pressure Test:

0.45Mpa (65psi)

### Coating

Interior: Epoxy Asphalt Paint.

Exterior: Asphalt Paint.

### Packing

Solid Wood Pallet

**Richang Qiaoshan Trade Co., Ltd.**

1-256, No. 35 Zhenxing Road, Changping, Beijing, China 102200

Ph: 86-10- 64644308 Fax: 86-10-64644308

[www.qiaoshan.co](http://www.qiaoshan.co)

Date: Aug-24

Dwg. No. : **KS D 4307 Class 1**