

배수용 주철관-2종



Contact: Mr. Li Zhiyong (Owner)

Mobile(Whatsapp): +86-13467138000

Skype: qslizy

E-mail: [qscasting@126.com](mailto:qscasting@126.com)

[www.qiaoshan.co](http://www.qiaoshan.co)

Tel: 86 10 64644308

Room 256, Building 1, No. 35 Zhenxing Road, Changping, Beijing 102200




Fax: 86 10 64644308

배수용 주철관-2종

**KS Approval No.: KWWA-KS-2016-053**

부표 25 노허브 직관 2종

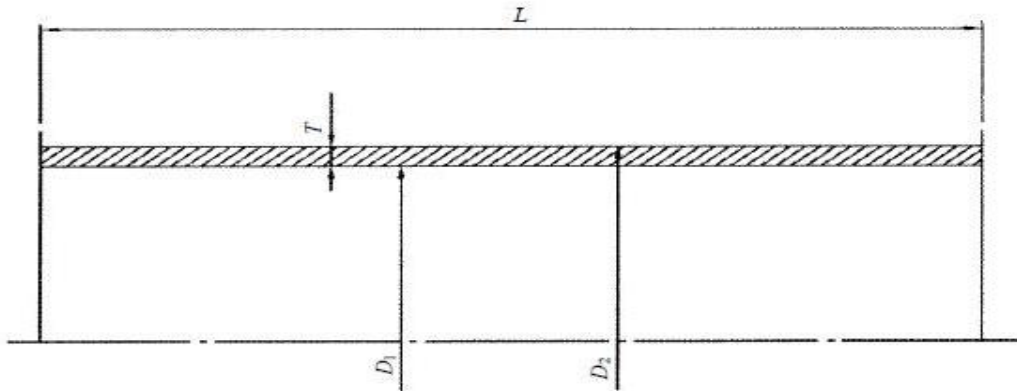

단위 : mm

호칭 지름	관 두께 $T$	실 안지름 $D_1$	실 바깥지름 $D_2$	무 게(kg) 유효 길이 ( $L$ )= 3 000
50	3.5	51	58	15.0
75	3.5	76	84	20.5
100	3.5	103	110	28.0
125	4.0	127	135	35.4
150	4.0	153	160	42.2
200	5.0	202	213	69.3

**Mechanical properties**

Minimum tensile strength 200 MPa

Minimum ring crush strength 350 Mpa

Maximum Brinell hardness 260 HB

**Straightness of Pipes**

0.15% of their length of nominal sizes greater than DN70;

0.20% of their length of nominal sizes equal to or less than DN70.

**End faces**

3° for nominal sizes DN40 to DN200

2° for nominal sizes DN250 to DN 600

**Hydraulic Pressure Test: 0.45Mpa (65psi)**

**Packing: Solid wooden pallet.**