


Dimensional Data are Subject to Manufacturing Tolerance and Change Without Notice

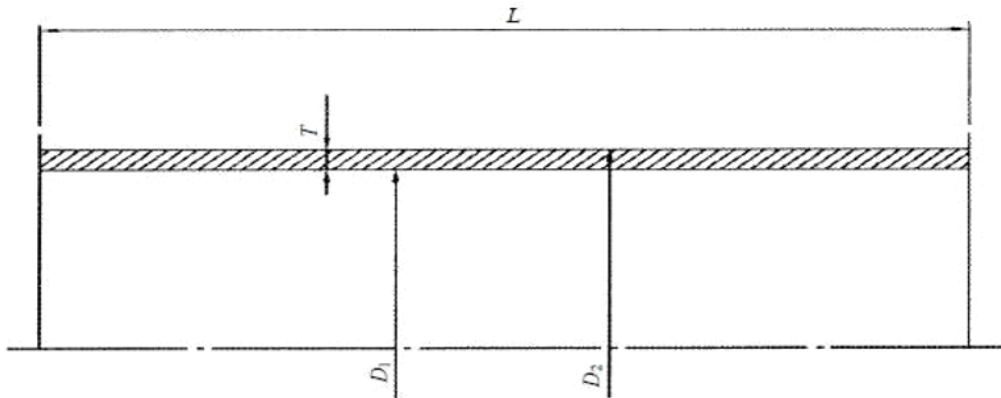

단위 : mm

호칭 지름	관 두께	실 안지름	실 바깥지름	무 게(kg)
	$T$	$D_1$	$D_2$	유효 길이 ( $L$ )= 3 000
50	3.5	51	58	15.0
75	3.5	76	84	20.5
100	3.5	103	110	28.0
125	4.0	127	135	35.4
150	4.0	153	160	42.2
200	5.0	202	213	69.3

Minimum tensile strength 200 MPa  
 Minimum ring crush strength 350 Mpa  
 Maximum Brinell hardness 260 HB

### Straightness of Pipes

0.15% of their length of nominal sizes greater than DN70;  
 0.20% of their length of nominal sizes equal to or less than DN70.

### End faces

3°for nominal sizes DN40 to DN200  
 2°for nominal sizes DN250 to DN 600

### Hydraulic Pressure Test:

0.45Mpa

### Packing

Solid Wood Pallet